

## The safety device (non-return valve / check valve) **GRV50-VA:**

### Type GRV50-VA for protection of pipelines, tapping points and equipment

The safety device GRV50-VA:

- avoids dangerous gas mixtures by a gas non-return valve (NV)
- a dust filter protects the gas non-return valve against contamination
- every safety device is 100% tested
- all metal components in stainless steel 1.4305 / spring 1.4310

### Safety elements of the IBEDA non-return valve GRV50-VA:

- NV Gas non-return valve

### Additional features:

- DF Dust filter

For further information: <http://www.ibeda.com/en/gas-non-return-valves>

### Maintenance:

The safety devices are to be tested by a qualified and authorised person at regular intervals according to country specific regulations. The safety device is to be tested for gas tightness and gas return at least once a year.

It is not allowed to open the safety devices.

The dust filter may be replaced by a qualified person.



NG-4390CQ0062



## Technical Data:

### Safety device GRV according to DIN EN ISO 5175-2: not flashback resistant, not flashback proof

<b>Gas types:</b>	Industrial gas (C)	Hydrogen (H)	Natural Gas (Methane) (M) cleaned Bio gas (M)	Propane (P)	Oxygen (O)	Compressed Air (D) Nitrogen (N) Carbon dioxide (N) Argon (N) Helium (N)
<b>Working pressure:</b>	2,0 MPa 20 bar					
<b>Cracking pressure:</b>	4 to 6 mbar position-independent					
<b>Gas temperature:</b>	-20°C up to +70°C ( Oxygen -20°C up to +50°C)					
<b>Ambient temperature:</b>	-20°C up to +70°C					
<b>Threads:</b> DIN ISO 228 ANSI/ASME B1.20.1	G2RH F/F <sup>3)</sup> G1 1/2RH F/F <sup>3)</sup> 2 NPT F/F <sup>3)</sup> 1 1/2 NPT F/F <sup>3)</sup>					
<b>Flange connection:</b> EN 1092-1 Type 04	DN40 DN50					
<b>Measure and weight:</b>	diameter:	length:		weight:		
Thread G1 1/2 – 1 1/2NPT:	94 mm	124 mm		3,7 kg		
Flange DN40:	150 mm	316 mm		11,0 kg		
Thread G2 – 2NPT:	94 mm	145 mm		4,6 kg		
Flange DN50:	160 mm	337 mm		11,0 kg		
<b>Application:</b>	Heating burner, gas mixing- and control systems, applications according to EN 746-2					

Other materials, surface finishing, gas types and additional connections available on request.

<sup>3)</sup> F = Female, M = Male

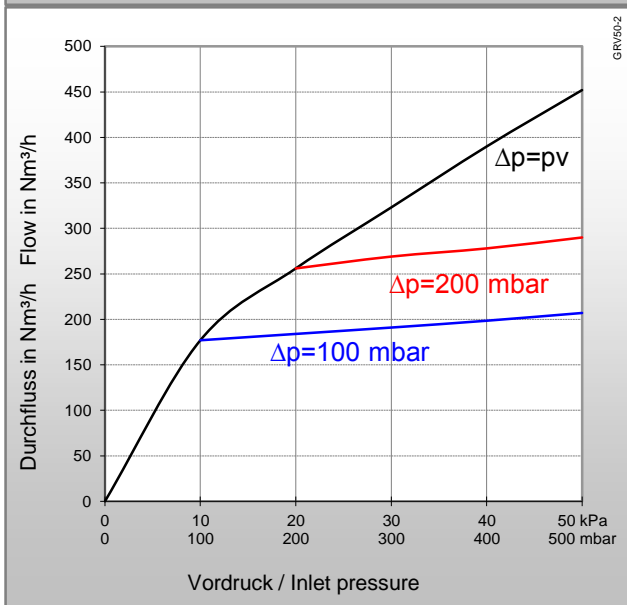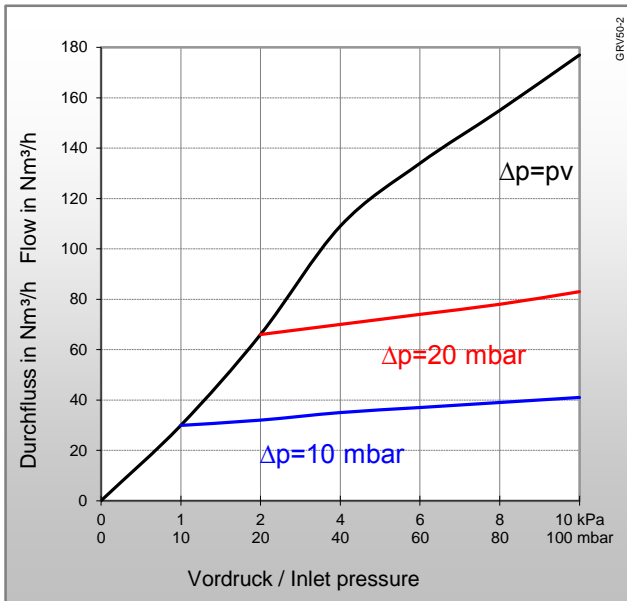

## Type: GRV50-VA

### Flow rates [air]:

pv = Primary pressure

ph = Secondary pressure

$\Delta p$  = Primary pressure minus Secondary pressure

### Conversion Factors:


10 kPa = 100 mbar = 0,01 MPa = 0,1 bar = 1,45 psi

1 m<sup>3</sup>/h = 35,31 cu ft/h

	H	P	L	M	M	O
QG ►	H <sub>2</sub>	C <sub>3</sub> H <sub>8</sub>	C <sub>3</sub> H <sub>6</sub>	CH <sub>4</sub> +C	CH <sub>4</sub>	O <sub>2</sub>
F	3,8*	0,90	0,92	1,25	1,4	0,95

\* Conversion factor 2.5 for devices comprising a flame arrestor  
The conversion factor for free flow is 3.8.  
(Reference: BAM report 220, D. Lietze)

### Example:

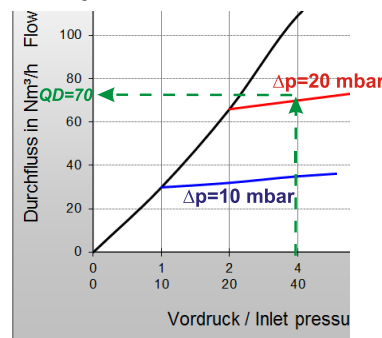

$$QG = QD \times F$$

$$QG \text{ ► P} = 70 \times 0,9 = 63 \text{ m}^3/\text{h C}_3\text{H}_8$$

QG = flow / gas type

F = conversion factor

QD = flow / air

Example flow rate type: GRV50-VA G2RH F/F.  
Values for other connections on request.

### Declaration of conformity

We, the manufacturer, hereby declare that the safety devices in accordance with the requirement of the following directives and standards

Directive: 2014/68/EU Pressure Equipment Directive

Standard: DIN EN ISO 5175 Part 2

Safety devices in accordance with DIN EN ISO 5175-2 for combustible or oxidising gases (group 1), Model GRV, are subject to the conformity assessment procedure pursuant to Pressure Equipment Directive 2014/68/EU, Category I, Module A.

### Certification / Technical Standards / Rules

BAM Federal Institute for Materials Research and Testing, DVGW German Technical and Scientific Association for Gas and Water, DGUV German Health and Safety Regulations, DVS German Association for Welding, Cutting and Allied Processes, TRBS German Technical rules for operation safety.

### Standards/ Approvals

Company certified according to

ISO 9001:2015 and ISO 14001:2015,

CE-marking according to: Pressure Equipment Directive 2014/68/EU

(Subject to change without notice)